

Nordberg cone crushers  
HP3, HP4, HP5 & HP6



Keeping you  
ahead!







# Nordberg new generation cone crushers: Keeping you ahead

There's no better choice than a cone crusher when it comes to . . .

- high productivity,
- low operating and wear costs,
- long service life, and high product yield with desired shape and gradation.

Metso leads this market with its high performance HP Series cone crushers for the aggregate and mining markets.

HP (High Performance) Series cone crushers feature a unique combination of crusher speed, throw, and cavity design. This combination is renowned for providing higher capacity and superior product quality, and having a wider range of application suitability:

- limestone to taconite,
- road ballast to manufactured sand,
- compact portable plant to the largest stationary.

Field-proven HP series cone crushers provide unbeatable performance in secondary, tertiary, and quaternary applications. They provide the highest capacity, the best product shape, the highest on-spec yield, easy automation, and the greatest possible reliability and flexibility.

## The next generation

The HP5 follows successful HP3, HP4 and HP6 as the fourth model of an all-new range

of high performance cone crushers, which benefits from the very latest in Metso crushing technology. Its heavy duty design is a tribute to our 70+ years of experience with the Symons cone, known world-over for its rugged construction and application versatility. Labor saving features such as hydraulic setting adjustment, tramp release and cavity clearing recall the innovative Nordberg Omnicone and first generation of HP crushers.

But the next generation achieves new heights with unique features that produce the highest reduction ratios, ease of operation and low maintenance requirements. New cone delivers the highest performance and lowest operating costs. Make more product, better product at the same time improving the workplace and helping the environment.

## Designed for your needs

Fact. In today's dynamic crushing and screening environment, you adapt and innovate or you fall behind. That's why Metso listens to its customers, to find out what they need to succeed. To be honest, a lot of you seemed conflicted, wanting a high capacity tertiary/quaternary machine with:

- a small profile,
- tight settings,
- minimized operating costs, and
- the versatility for recrushing.

Metso's research and development team met that challenge with the new cone crushers. No more conflict. Designed for maximum versatility and hardest applications, it provides maximized productivity while minimizing operating costs.

## Why new generation cone crushers?

- Highest performance
- Less downtime
- Easy to maintain
- Power efficient
- Versatility



Technologically unique, the new generation cone crushers offer unprecedented performance. Their safe and easy maintenance ensure maximum reliability.

## Crusher working benefits

### Highest performance

The new cone crushers enable you to produce much finer products with fewer crushing stages, thereby lowering your investment and saving energy. How is this possible?

With a combination of optimized speed and large throw, HP new generation provides the highest reduction ratios of any current cone crusher. Due to its super-efficient crushing action, the new range has the best power utilization per cone diameter. So you save twice with lower kWh per ton of crushed end product and with lower recirculation load. Higher cavity density improves interparticular crushing action for end products with more consistent gradation and superior shape.

The new cone crushers maintain the proven threaded rotating bowl design. Comparative tests show equalized wear and more consistent setting around the entire circumference of the crushing chamber. Also the use of a newly designed tramp release system, with fixed return point, makes sure that the crusher setting is instantaneously maintained even after passing a piece of tramp iron.

### Less downtime

Another way the new crushers deliver is less downtime and increased operator confidence. Dual-acting hydraulic tramp release cylinders let the crusher pass tramp iron that would stall, or damage, many other crushers. If the crusher does stop under load, the dual-acting cylinders provide a large

clearing stroke, independent of liner wear, to quickly clear the crushing cavity. An advanced fastening system for the mantle and bowl liner makes backing material unnecessary, and makes liner changes faster. Thicker liners mean more material to wear. When liners are changed or the crusher is reconfigured, the same hydraulic motors that rotate the bowl for setting adjustment will rotate the bowl completely out of the adjustment ring threads, greatly simplifying liner replacement.

If you pull the head you will find a new fixed counterweight guard that protects the counterweight and seals out dust.


### Easy to maintain

Bronze bushings used throughout provide superior load capability in the dusty, highshock crushing environment. They cost less than rolling element bearings and are easy to replace in the field with normal tools. The new cone crushers are easy to disassemble. All components are accessible from the top or side. The bowl and head are easily removed; no interference fit to contend with.


### Power efficient

As well as being fitted with the latest in high-efficiency motors, HP new generation crushers enable a higher output of finished product than any other cone crusher with the same power input.


The result is improved overall efficiency (less power consumed, more yield), and as a bonus, less carbon dioxide emission, making this generation of HP cone crushers the most ecological crushing machines on the market.

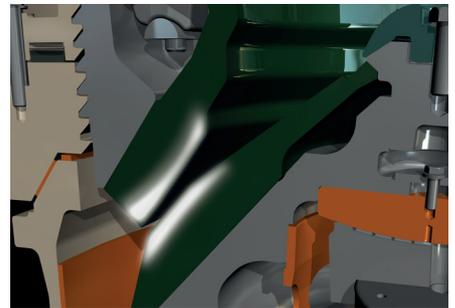


High crushing force

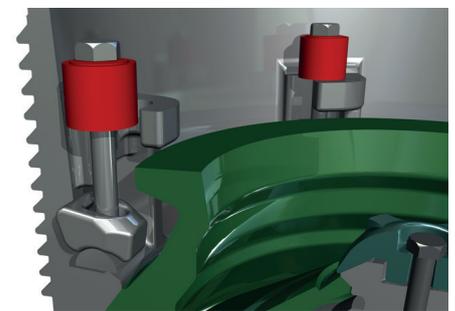

Liner change

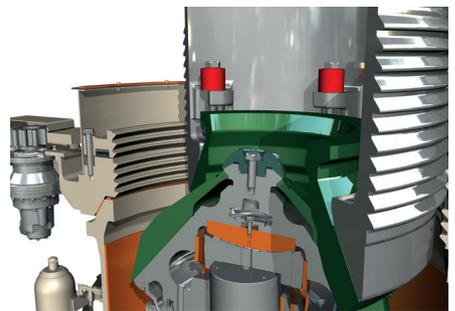

Dismantling of crusher

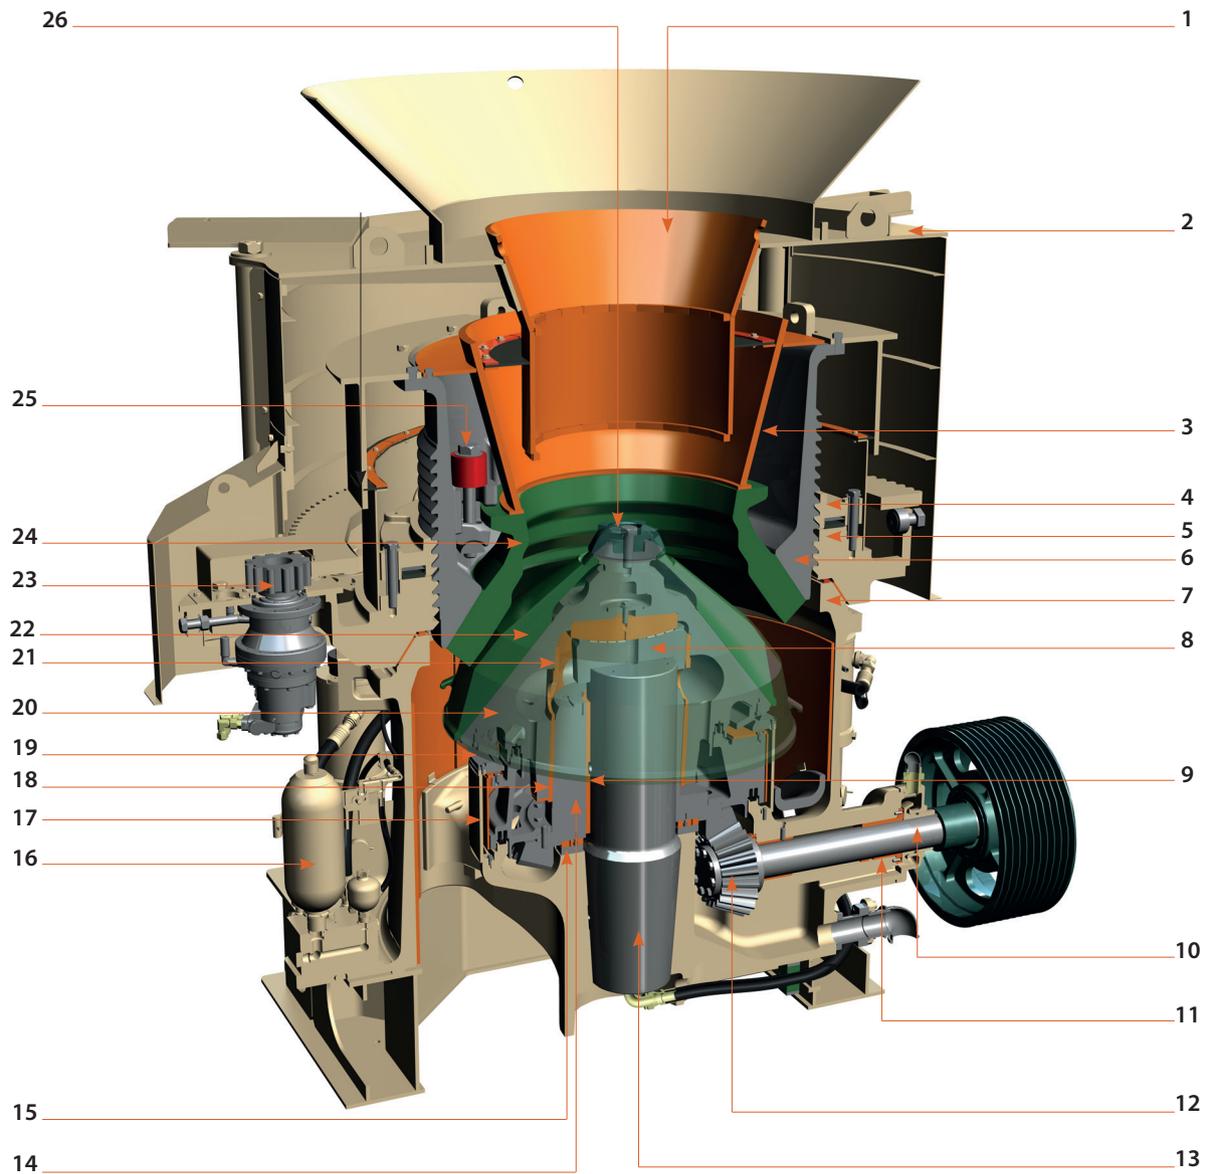

1 - Feed arrangement  
 2 - Safety shield  
 3 - Feed bowl hopper  
 4 - Clamping ring  
 5 - Adjustment ring  
 6 - Bowl  
 7 - Main frame  
 8 - Socket  
 9 - Eccentric bushing

10 - Countershaft  
 11 - Countershaft bushings  
 12 - Gear and pinion  
 13 - Main shaft  
 14 - Eccentric  
 15 - Eccentric thrust bearing  
 16 - Tramp release assembly  
 17 - Counterweight guard  
 18 - Lower head bushing

19 - Antispin device  
 20 - Head  
 21 - Upper head bushing  
 22 - Mantle  
 23 - Hydraulic adjustment motor  
 24 - Bowl liner  
 25 - Bowl liner fixation  
 26 - Cone feed plate

**Versatility**

Due to their strength, speed range and ease of converting from coarse to extra fine applications, the new crushers provide application flexibility that was unheard of until now.

- Save stockpile space by re-crushing excess or slowmoving products without an intermediate crushing stage.
- Converting from coarse to extra fine application and back again just by changing liners and rpm.
- Liner and rpm combinations go from secondary applications to sand manufacturing.


**Crusher automation**

Metso IC automation solutions ensure full performance and are carefully designed to meet customer expectations and crushing plant requirements for consistent performance, safety and easy control of crusher parameters. IC automation brings precision and consistency to crusher operations. This leads to predictable and stable production and end-product quality, and thus ensures profitable operation of the crusher and the whole crushing plant. With optimized start-up and shut-down procedures and sequences

**Asset protection**

The new tramp release design also protects the main frame from uncrushables by smoothing out the impact forces and returns the bowl to its original position after passing tramp iron. Inside, a new fixed guard protects counterweight and seals out dust.

An optional cover around the crusher protects employees from casual contact with adjustment and tramp release mechanisms. It also helps protect the workplace with reduced dust emissions. The environment benefits too from the advanced fastening system for mantle and bowl liner that do not require backing material.

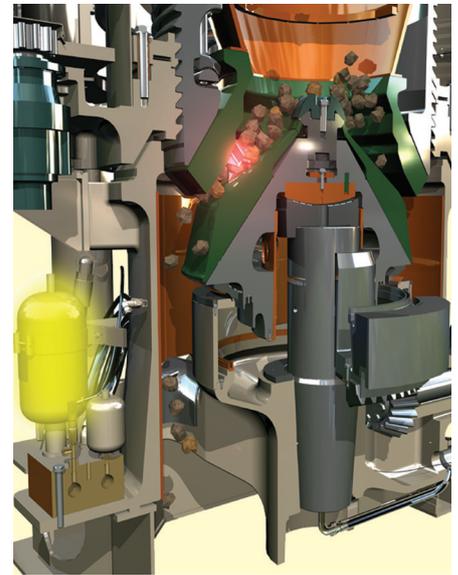

Tramp release


integrated into the IC automation, you can be sure that the crusher is working correctly in all circumstances and that the downtime of the crusher is minimal. Metso IC crusher automation allows you to maximize the performance of the high-quality Metso crusher. This is done with carefully defined safety parameters for oil temperature, power draw and oil pressure, which are indicators of the actual crusher load. IC crusher automation monitors the crusher condition and gives an early indication if there's a problem in the crusher. This can

help solve a problem before it becomes something serious and costly. Metso IC crusher automation can be easily connected to any plant automation system used by the crushing and screening industry. This will enable centralized control of the crusher and the whole plant, allowing the operator to safely control and alter crusher operating parameters according to production needs from a single location.



IC7000 automation

Dimensions				
Modèles	A mm (in)	B mm (in)	C mm (in)	D mm (in)
HP3	2 778 (109.37)	2 146 (84.49)	2 475 (97.44)	2 817 (110.90)
HP4	2 955 (116.34)	2 512 (98.90)	2 754 (108.42)	3 147 (123.90)
HP5	3 438 (135.35)	2 695 (106.10)	2 893 (113.90)	3 295 (129.72)
HP6	3 854 (151.73)	3 062 (120.55)	3 522 (138.66)	3 953 (155.63)

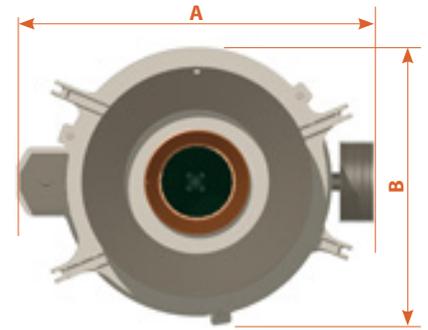

Technical information				
	Nominal feed opening mm (in)	Maximum power kW (hp)	Crusher weight kg (lb)	Complete crusher weight* kg (lb)
HP3	220 (8.66)	220 (300)	13 040 (28 750)	17 600 (38 800)
HP4	252 (9.92)	315 (400)	19 810 (43 670)	25 800 (56 880)
HP5	312 (12.28)	370 (500)	24 970 (55 050)	28 820 (63 540)
HP6	330 (13.00)	450 (600)	33 000 (72 750)	45 400 (100 090)



\* Complete crusher weight: crusher + subframe, motor sub frame, covers, feed and discharge arrangement


Cavity	Minimum setting mm (in)				Feed opening mm (in)			
	HP3	HP4	HP5	HP6	HP3	HP4	HP5	HP6
Extra-coarse	25 (1.00)	28 (1.10)	30 (1.20)	30 (1.20)	200 (7.89)	237 (9.93)	312 (12.30)	328 (12.91)
Coarse	20 (0.79)	25 (1.00)	25 (1.00)	25 (1.00)	183 (7.20)	203 (7.99)	252 (9.90)	279 (10.98)
Medium	15 (0.59)	16 (0.63)	20 (0.79)	20 (0.79)	156 (6.15)	158 (6.22)	195 (7.70)	196 (7.71)
Fine	11 (0.43)	10 (0.39)	10 (0.39)	13 (0.52)	95 (3.74)	116 (4.55)	130 (5.10)	106 (4.17)
Extra-fine	8 (0.31)	8 (0.31)	6 (0.24)	9 (0.35)	18 (0.78)	67 (2.64)	50 (2.00)	52 (2.05)

### Crusher capacities

The capacity figures given are approximate only and give an idea of what the crusher is able to produce. They apply for open circuits and dry material with a spec. gravity (2.65) of usual Granite. As a crusher is part of a process, its performance depends on crushability and density of the material, proper selection and operation of feeders, conveyors, screens, supporting structure, electric motors, drive components and surge bins. **Contact us for choosing the right machine for your application.**

Closed side setting (CSS)											
CSS		8 mm	10 mm	13 mm	16 mm	19 mm	22 mm	25 mm	32 mm	38 mm	45 mm
HP3	mtph	94-122	108-147	136-185	164-220	182-241	199-262	210-279	217-307	251-349	279-388
	stph	104-135	119-162	150-204	181-243	200-266	219-289	231-308	239-339	277-385	308-427
HP4	mtph	135-175	155-210	195-265	235-315	260-345	285-375	300-400	310-440	360-500	400-555
	stph	150-190	170-230	215-290	260-345	285-380	315-410	330-440	340-485	395-550	440-610
HP5	mtph	158-205	181-246	229-311	275-369	304-403	335-439	352-460	380-500	422-550	468-600
	stph	177-229	203-275	256-348	308-413	340-451	375-491	394-515	426-560	472-616	524-672
HP6	mtph		220-300	280-380	335-450	370-490	410-535	430-570	440-630	515-715	570-790
	stph		245-330	310-415	370-495	410-540	450-590	470-630	490-690	565-785	630-870

### Gradation curves\*

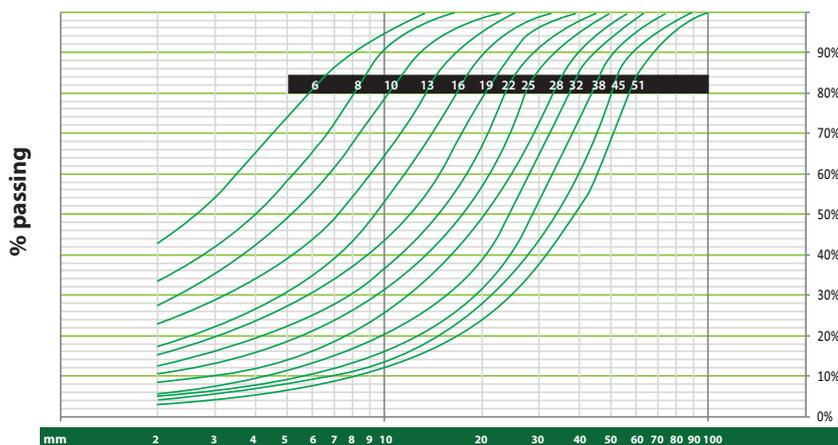

\* The gradation and capacities shown are dependant on the feed gradation, the crushing chamber, the material density, the material cleanliness, its moisture and its crushability.

## Metso's Mining and Construction crushing and screening equipment

### Product families:

#### Unit crushers

- C series jaw crushers
- Primary gyratory crushers
- GP series cone crushers
- HP series cone crushers
- MP series cone crushers
- NP series horizontal impact crushers
- Barmac series vertical impact crushers

#### Unit screens

- DF series screens
- CVB series screens
- ES series screens
- TS series screens
- MF series screens
- RF series screens

#### Unit feeders

- TK series feeders
- VF series feeders
- LH.G series feeders
- VG series feeders
- PF series feeders
- HRBM series feeders

#### Mobile crushing and screening plants

- Lokotrack LT series track-mounted crushing plants
- Lokotrack ST series track-mounted screening plants
- Lokotrack CT and CW series track- and wheel-mounted conveyors
- NW series wheel-mounted crushing plants

#### Stationary crushing plants

- Complete plants for aggregate production
- Complete plants for recycling applications



[www.metso.com/miningandconstruction](http://www.metso.com/miningandconstruction)  
[minerals.info.csr@metso.com](mailto:minerals.info.csr@metso.com)

### Mining and Construction Technology main contacts

#### AUSTRALIA AND NEW ZEALAND

##### Metso Minerals (Australia) Ltd

1110 Hay Street  
West Perth, WA 6005  
Australia  
Phone: +61 8 9420 5555  
Fax: +61 8 9320 2500

#### CHINA

##### Metso Minerals (Beijing) Ltd

19/F, The Exchange Beijing, Tower 4,  
No. 118 Jian Guo Lu Yi Chaoyang District  
100022 Beijing,  
China  
Phone: +86 10 6566 6600  
Fax: +86 10 6566 2583

#### EUROPE, MIDDLE EAST AND AFRICA

##### Metso Minerals España, S.A.

C/ Rivas N° 4  
28032 Madrid  
Spain  
Phone: +34 91 825 5700  
Fax: +34 91 825 5740

#### INDIA AND ASIA-PACIFIC

##### Metso Minerals (India) Pvt Ltd

1st Floor, DLF Building No. 10,  
Tower A, DLF Cybercity  
DLF Phase II,  
Gurgaon 122002  
India  
Phone: +91 124 235 1541  
Fax: +91 124 235 1601

#### NORTH AND CENTRAL AMERICA

##### Metso Minerals Industries Inc.

20965 Crossroads Circle  
Waukesha, WI 53186  
U.S.A.  
Phone: +1 262 717 2500  
Fax: +1 262 717 2504

#### RUSSIA AND OTHER CIS COUNTRIES

##### ZAO Metso Minerals (CIS)

V.O. Liniya, 70  
199178 St. Petersburg  
Russia  
Phone: +7 812 740 3040  
Fax: +7 812 740 5775

#### SOUTH AMERICA

##### Metso Minerals Indústria e Comércio Ltda

Avenida Independência, 2500 - Éden  
18087-050 Sorocaba  
Brazil  
Phone: +55 15 2102 1300  
Fax: +55 15 2102 1696

#### METSO'S MINING AND CONSTRUCTION TECHNOLOGY

Lokomonkatu 3, P.O. Box 306  
FI-33101 Tampere  
Finland  
Phone: +358 20 484 142  
Fax: +358 20 484 143